

# EXAMS 4 SUCCESS

## Dell EMC

## E20-807

## Questions & Answers

### VMAX All Flash and VMAX3 Solutions Exam

(Demo Version - Limited Content)



# Version: 8.0


---

## Question: 1

---

Based on the Array Utilization Dashboard shown in the exhibit, a frontend port is showing higher utilization on Director 1.

How can this situation be corrected?

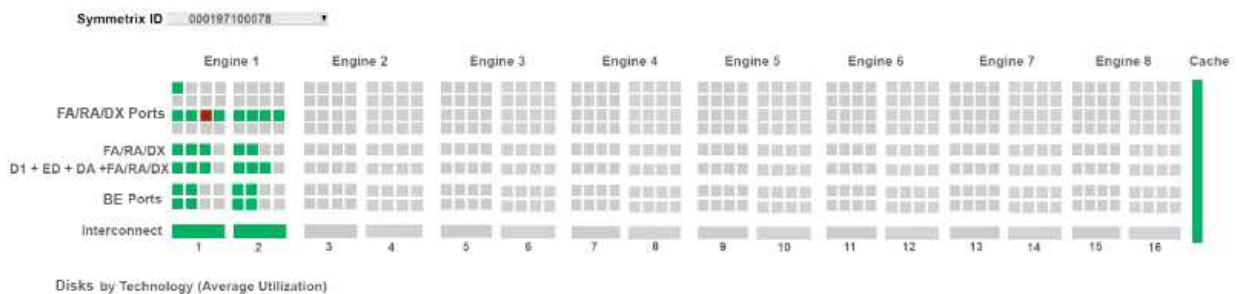

- A. Add another engine to provide for Frontend Emulation CPUs
- B. Redistribute the workload onto other available ports
- C. Increase cache on the engine
- D. Add additional capacity to support the frontend workload

---

**Answer: B**

---



---

## Question: 2

---

Please check the option that best describes your relationship with Dell EMC.

- A. Dell EMC Employee
- B. Dell EMC CustomerPartner
- C. Other

---

**Answer: B**

---



---

## Question: 3

---

### FILL IN THE BLANK

Please enter your Powerlink Username below. If you do not have a Powerlink Username or do not

know your Powerlink Username enter none.  
Powerlink Username: \_\_\_\_\_

---

**Answer: John\_Doe**

---

---

**Question: 4**

---

SRDF/Metro has been deployed. What is the state and external identity of the R2 devices after initial synchronization has completed?

- A. State: Read/WriteIdentity: R1 Identity
- B. State: Read/WriteIdentity: Original Identity
- C. State: Write DisabledIdentity: Original Identity
- D. State: Write DisabledIdentity: R1 Identity

---

**Answer: A**

---

---

**Question: 5**

---

What is requirement when setting up a Composite Group (CG) for SRDF/Star in an open systems environment?

- A. Composite Group is created with the Star Build CG action
- B. Composite Group is created with the type set to ANY
- C. Recovery group assignments should match the recovery groups defined in the Star Options file
- D. Names assigned to RDF groups match the site names in the Star Options file

---

**Answer: C**

---

---

**Question: 6**

---

What is a Dell EMC recommended best practice when connecting CloudArray to a VMAX3?

- A. Hosts should average at least 2,500 IOPS
- B. Internal SRP should be used
- C. Host I/O limits should be used
- D. Host I/O limits should not be used

---

**Answer: B**

---

---

**Question: 7**

---

SRDF/Metro has been deployed between two data centers. SRDF/Metro is operating normally. Maintenance tasks at the R1 data center require the array to be offline. Which SRDF operation should be executed on the Metro RDF pairs to facilitate the planned outage without affecting application I/O?

- A. Failover
- B. Split with bias set to R2
- C. Suspend with bias set to R2
- D. Swap

---

**Answer: A**

---

---

**Question: 8**

---

FAST.X needs to be configured on a VMAX3 array to access LUNs on an XtremIO X-Brick. In addition, existing data on the LUNs has to be preserved and made available for host access.

How can this be accomplished?

- A. By externally provisioning the LUNs
- B. By incorporating the LUNs
- C. By zoning the host HBAs to the VMAX3 array FE ports
- D. By zoning the host HBAs to the VMAX3 array DX ports

---

**Answer: B**

---

# EXAMS SUCCESS

Thank you for trying

**Our E20-807 Exam Dumps PDF  
Demo**

Try E20-807 practice question

If you want to try E20-807 Exam Practice Test  
Questions So go to below link and try it!

<https://www.exams4success.com/e20-807/practice-questions>